Southern PRIDE

## SPECIFICATIONS
## MODEL BBR-700-FL

**NOTE:**
**Photo Shows the Optional Smoke Extractor on SLSE Models.**

**COOKING CAPACITIES FOR THE BBR-700**

| | | |
|---|---|---|
| Pork Butt (7 lb.) | 100 pieces | 700 lb. total |
| St. Louis Ribs (2.75lb.) | 135 pieces | 371 lb. total |
| Chicken (3lb.) | 156 pieces | 468 lb. total |
| Brisket (12 lb.) | 50 pieces | 600 lb. total |
| Spare Ribs (3.5lb.) | 90 pieces | 315 lb. total |

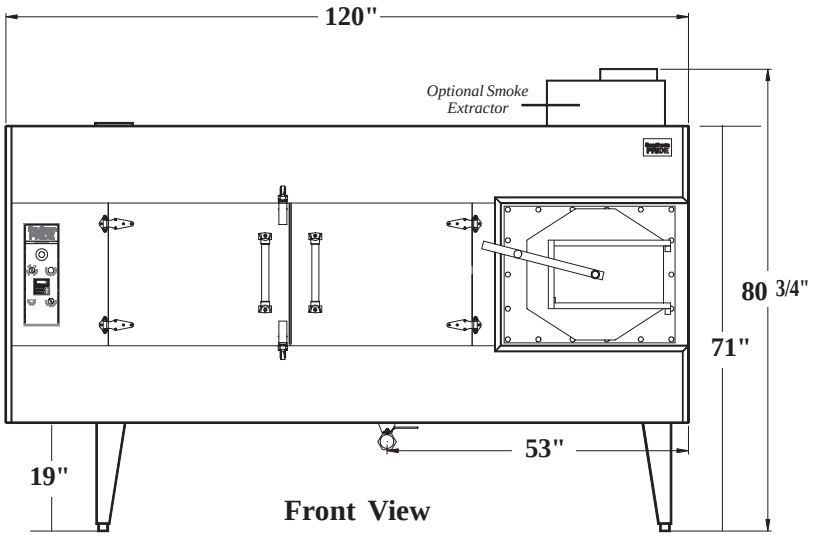


**Front View**

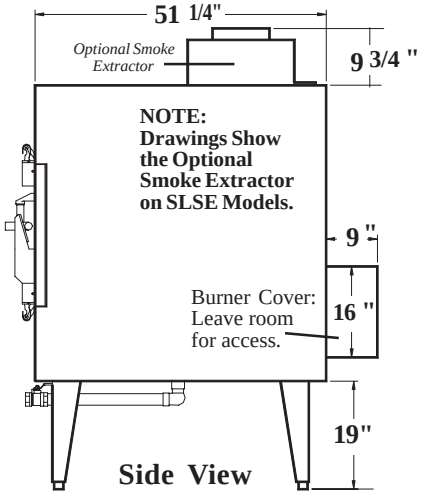


**Side View**

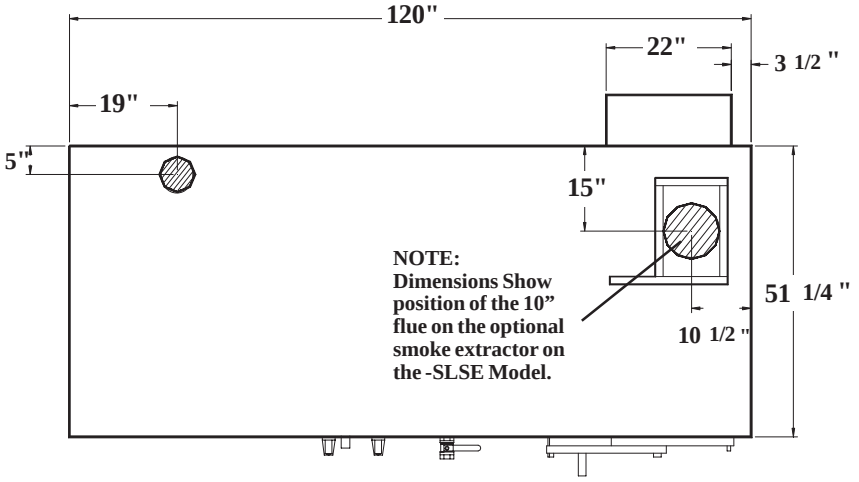


**Top View**

## BBR-700-SL

**Electrical Requirements:** 120 volts AC, 60 hertz, 1 phase, 15 amp wiring required.

**Gas Requirements:** 125,000 btu, 1/2 NPT

**Construction:** Inner Liner: 12 gauge H.R. Steel or 12 gauge Stainless Steel. Exterior: 22-gauge Polished Stainless Steel

**Firebox:** 20" diameter 1/4" H.R. steel pipe with 1/4" H.R. firebox door. Uses wood logs or charcoal. Capacity: 3-4 logs 4-6" dia. 12-16" long.

**Dimensions:** 80 3/4" tall, 120" wide, 60 1/4" deep (including covers) w/19" legs

**Shell Dimensions:** 52" tall, 51 1/4" wide, 120" long

**Food Racks:** Rotisserie with five (5) hanger racks, each with three (3) 12"x 60" food racks (15 Total). 75 Sq.Ft. of Cooking Surface. 3 1/2" Spacing between food racks.

**Air Circulation:** One Convection Fan.

**Temperature Range:** 140-325 degrees F.

**Burner:** Electronic Pilot Gas Burner (Specify Natural or L.P. gas.)

**Shipping Weight:** 2,300 lbs.

**Approvals:** UL, ULC, [redacted]

**Venting:** See back page for venting instructions.

Southern PRIDE

# BBR-700-FL
# VENTING INSTALLATION

**VENTING:**
**The Model BBR-700-FL** should be vented under a canopy hood rated for commercial cooking applications.

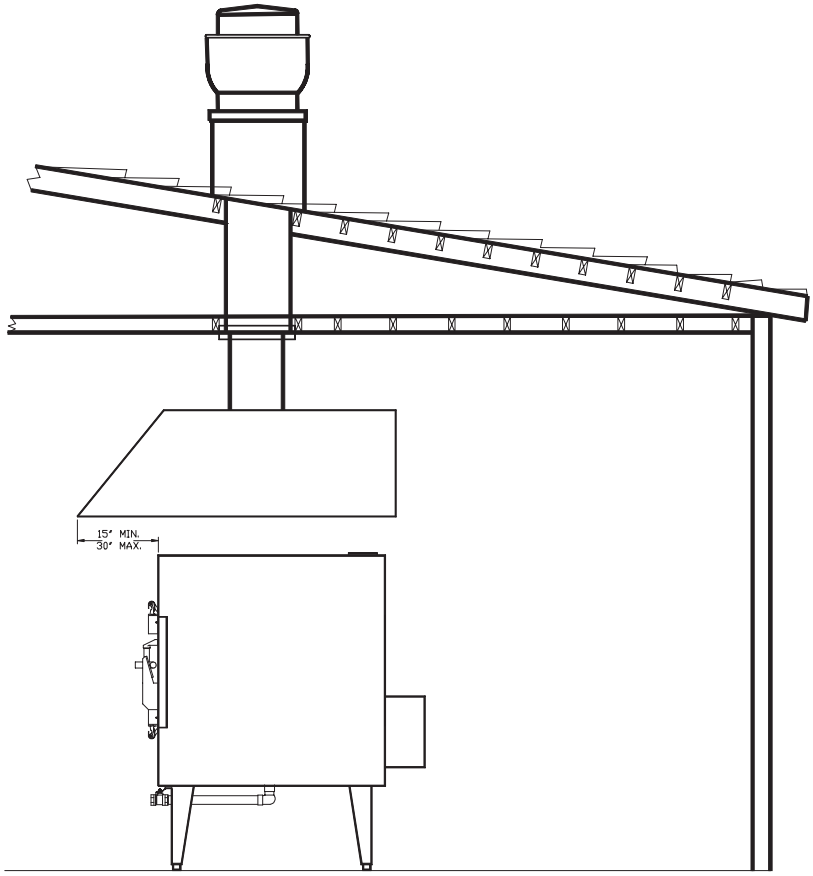


**The oven's minimum clearances from combustible materials** are 18" on left side, 2" on right, 18" on top, 48" from front, and 2" on back. Minimum clearances 18" to chimney connector and to smoke extractor chimney connector. Floor may be constructed of a combustible material. (Note: minimum clearance dimensions are from the oven cabinet, not from component cover.) (If provision is made for access to service, minimum clearance can be reduced to 2" on left side.) May be installed through wall with zero clearance with BBR kit No. 2099.

**ANY VENTILATION SYSTEM MUST BE INSTALLED IN ACCORDANCE WITH LOCAL CODES. CONSULT WITH LOCAL OFFICIALS AND A COMMERCIAL KITCHEN VENTILATION CONTRACTOR PRIOR TO INSTALLATION.**

Southern PRIDE

Southern Pride Distributing, L.L.C.
5003 Meadowland Pky - Marion, Illinois 62959
www.southern-pride.com sales@sopride.com service@sopride.com parts@sopride.com
Sales: 800-851-8180 Service: 800-437-2679 Service Fax: 618-993-0378

Phone: 618-997-9348
Fax: 618-993-5960

2/2/07