




Southern PRIDE

SPECIFICATIONS MODEL XLR-1400-SL



COOKING CAPACITIES FOR THE XLR-1400-SLSE

Pork Butt (7 lb.)	144 pieces	1008 lb. total
St. Louis Ribs (2.75lb.)	150 pieces	412 lb. total
w/Optional Rib Racks	288 pieces	792 lb total
Chicken (3lb.)	216 pieces	648 lb. total
Brisket (12 lb.)	72 pieces	864 lb. total
Spare Ribs (3.5lb.)	120 pieces	420 lb. total

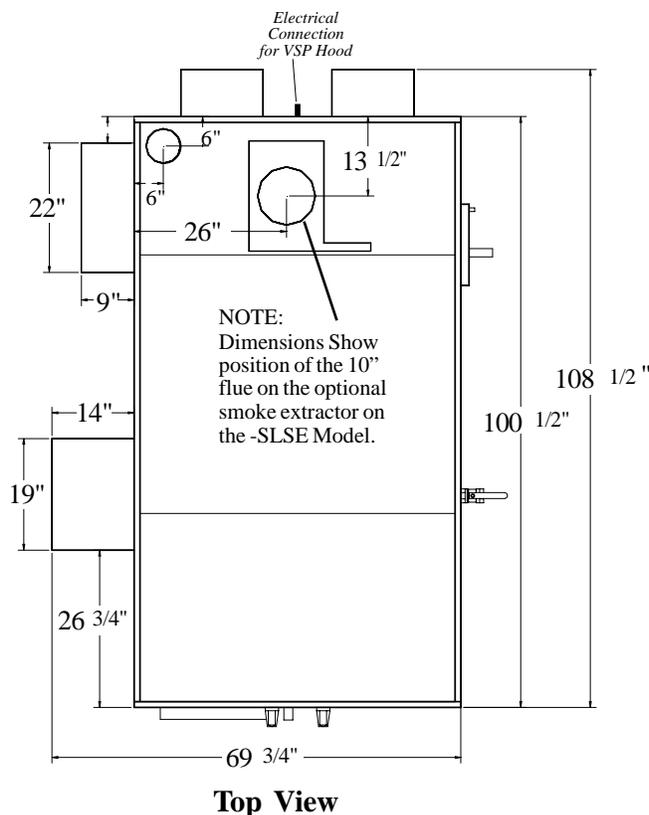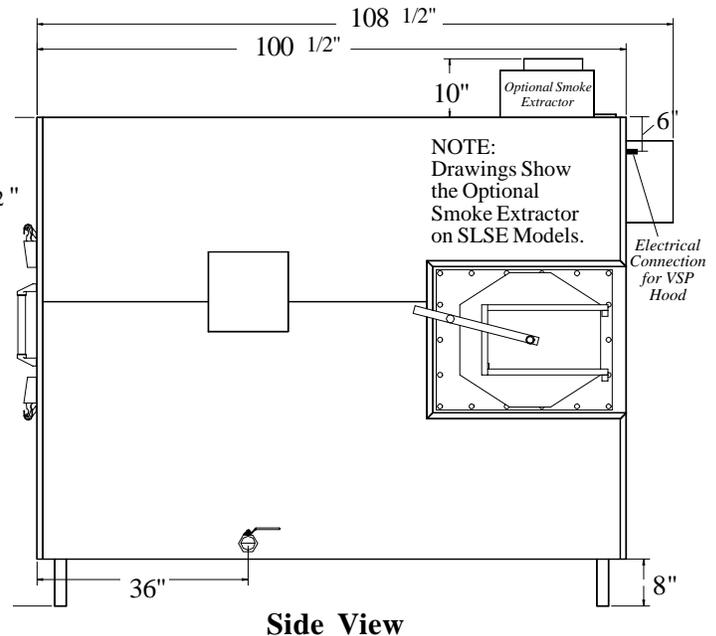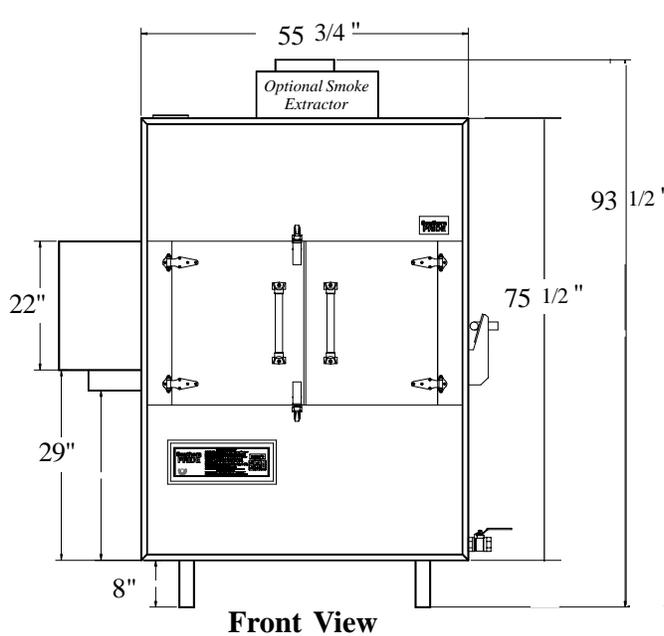

XLR-1400-SL

Electrical Requirements: 120 volts AC, 60 hertz, 1 phase, 15 amp wiring required.

Gas Requirements: 125,000 btu, 1/2 NPT

Construction: Inner Liner: 12 gauge H.R. Steel or 12 gauge Stainless Steel. Exterior: 22-gauge Polished Stainless Steel

Firebox: 20" Diameter 1/4" thick H.R. pipe. 1/4" thick firebox door. Uses wood logs or charcoal. Capacity: 3-4 logs 4-6" dia. 12-16" long.

Dimensions: 93 1/2" tall, 69 3/4" wide, 08 1/2" deep (including covers) w/8" legs.

Shell Dimensions: 75 1/2" tall, 55 3/4" wide, 100 1/2" long

Food Racks: Rotisserie with six (6) hanger racks, each with five (5) 12"x 42" food racks (30 Total). 105 Sq.Ft. of Cooking Surface. 3 1/2" Spacing between food racks.

Air Circulation: Two Low Velocity Convection Fans.

Temperature Range: 100-325 degrees F.

Burner: Electronic Pilot Gas Burner (Specify Natural or L.P. gas.)

Approvals: UL, ULC, NSF



Venting: See back page for venting instructions.

VSP HOOD SYSTEM: Purchased through Southern Pride

VSP HOODS are U/L Listed to the applicable Southern Pride oven models and are NSF Certified.


HOOD SYSTEM TO INCLUDE:

1. Ventilation Hood
2. Two speed fan (1380/2000)
3. Curb with vented extension and hinge kit (Specify roof pitch)
4. Grease capture trough
5. Combustion chamber flue vent


SUPPLIED BY CUSTOMER:

6. Duct from hood to fan

NOTE: If you have a duct longer than 10 feet or an elbow in your duct your installation, it may require a larger capacity exhaust fan. Please specify your duct requirements when ordering the VSP Hood System.

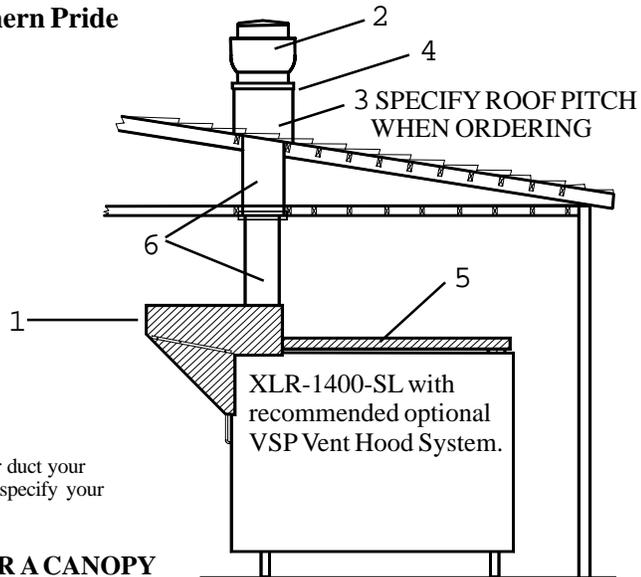

ALL MODELS MAY ALSO BE INSTALLED UNDER A CANOPY HOOD RATED FOR COMMERCIAL COOKING APPLIANCES.

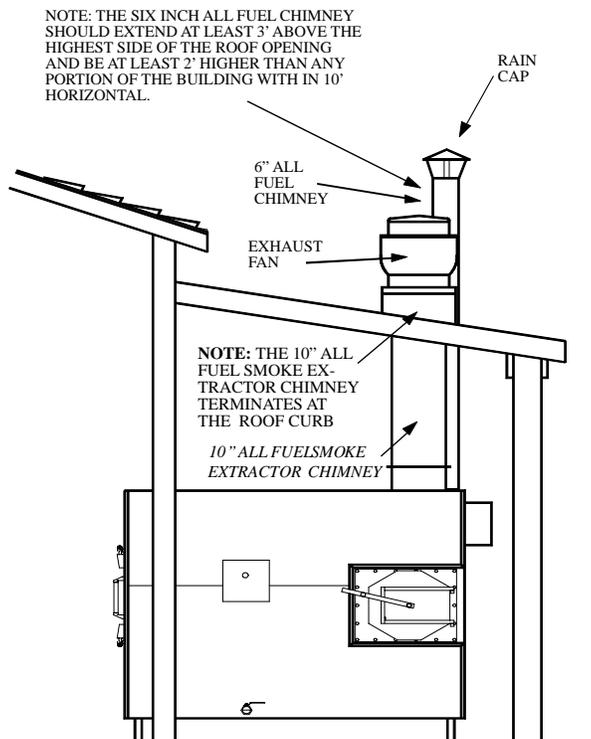

THROUGH THE WALL OR DIRECT VENT INSTALLATION

NOTE 1. When installing an Oven through a wall constructed of combustible material, use the **Southern Pride Insulation Kit** between the oven and the wall.

2. The room that the face of the oven is installed into should have a balanced or positive air pressure. If the room has negative air pressure, smoke could escape into the room during operation.

SUPPLIED BY SOUTHERN PRIDE: (*)

Smoke Extractor Damper with 10" chimney adapter plate

SUPPLIED BY CUSTOMER:

6" All Fuel Chimney, 6" Rain Cap, and all accessories necessary for installation of the 6" chimney.
10" All Fuel Chimney, Exhaust Fan (NOTE: Fan must be listed for use as a commercial kitchen ventilator), fan curb, and all accessories necessary for installation of the smoke extractor system.

The oven's minimum clearances from combustible materials are 18" on left side, 24" on right, 18" on top, 48" from front, and 2" on back. Minimum clearances are 18" to chimney connector and to smoke extractor chimney connector. Floor may be constructed of a combustible material. (Note: minimum clearance dimensions are from the oven cabinet, not from component cover.) (If provision is made for access to service, minimum clearance can be reduced to 2" on left side.) May be installed through a combustible wall with zero clearance with BBR kit No. 2099.

ANY VENTILATION SYSTEM MUST BE INSTALLED IN ACCORDANCE WITH LOCAL CODES. CONSULT WITH LOCAL OFFICIALS AND A COMMERCIAL KITCHEN VENTILATION CONTRACTOR PRIOR TO INSTALLATION.